

SINGLE-SUPPLY DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM2904C consists of two independent, high gain, internally frequency compensated operation amplifiers, which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks, and all the conventional op amp circuits, which now can be more easily implemented in single power supply systems. For example, the NJM2904C can be directly operated off of the standard +5V power supply voltage, which is used in digital systems and will easily provide the required interface electronics without requiring the additional ±15V power supplies.

■ FEATURES

- Single Supply
 - Operating Voltage +3V to +32V
 - Low Operating Current 0.7mA typ.
 - Slew Rate 0.6V/μs typ.
 - Bipolar Technology
 - Package Outline SOP8, DMP8
MSOP8 (TVSP8)* (U.D.)
 - Internal ESD protection
Human body model (HBM) ±2000V typ.
 - Wide temperature range -40°C to +105°C
- *MEET JEDEC MO-187-DA / THIN TYPE

■ PACKAGE OUTLINE



NJM2904CG
(SOP8)




NJM2904CM
(DMP8)



NJM2904CRB1 (U.D)
(MSOP8 (TVSP8))


■ PIN CONFIGURATION

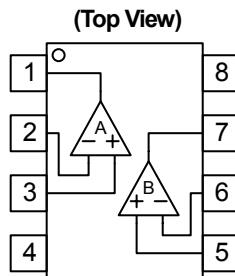

NJM2904CG
NJM2904CM
NJM2904CRB1

| PIN FUNCTION |
|------------------|
| 1.A OUTPUT |
| 2.A - INPUT |
| 3.A + INPUT |
| 4.V |
| 5.B + INPUT |
| 6.B - INPUT |
| 7.B OUTPUT |
| 8.V ⁺ |

■ EQUIVALENT CIRCUIT (1/2 Shown)

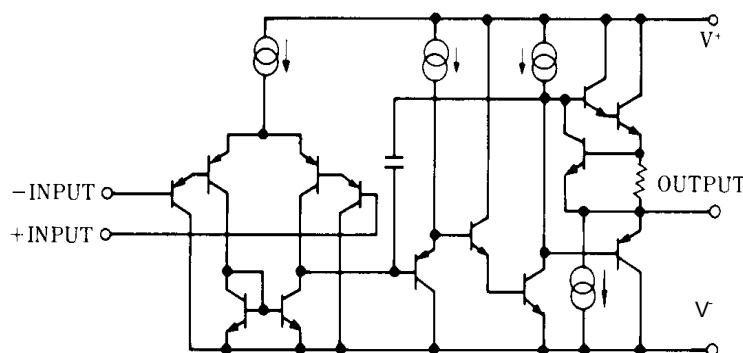

NJM2904C

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|------------------------------------|------------------------------------|---|------|
| Supply Voltage | V ⁺ (V ⁻ /V) | 32 (or ±16V) | V |
| Differential Input Voltage (Note1) | V _{ID} | ±32 | V |
| Input Voltage (Note2) | V _{IN} | V - 0.3 to V + 32 | V |
| Output Terminal Input Voltage | V _O | V - 0.3 to V ⁺ + 0.3 | V |
| Power Dissipation | P _D | SOP : 690 (Note3) 1000 (Note4) DMP : 470 (Note3) 600 (Note4) MSOP : TBD | mW |
| Operating Temperature Range | T _{opr} | -40 to +105 | °C |
| Storage Temperature Range | T _{stg} | -65 to +150 | °C |

(Note1) Differential voltage is the voltage difference between +INPUT and -INPUT.

(Note2) Input voltage is the voltage should be allowed to apply to the input terminal independent of the magnitude of V⁺.

The normal operation will establish when any input is within the Common Mode Input Voltage Range of electrical characteristics.

(Note3) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 2layers, FR-4) mounting







(Note4) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR-4) mounting

■ ELECTRICAL CHARACTERISTICS

(V⁺=5V, V⁻=0V, Ta=25°C, unless otherwise noted.)







| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|---------------------|--|------|------|---------------------|--------|
| Operating Current | I _{CC} | V ⁺ =5V, no signal V ⁺ =30V, no signal | - | 0.7 | 1.2 | mA |
| - | - | - | - | - | 2 | mA |
| Input Offset Voltage | V _{IO} | R _S =0Ω | - | 0.5 | 7 | mV |
| Input Bias Current | I _B | | - | 20 | 150 | nA |
| Input Offset Current | I _{IO} | | - | 2 | 30 | nA |
| Large Signal Voltage Gain | A _V | R _L ≥2kΩ | 94 | 100 | - | dB |
| Supply Voltage Rejection Ratio | SVR | V ⁺ =5 to 30V, R _S <10kΩ | 65 | 100 | - | dB |
| Input Common Mode Voltage Range | V _{ICM} | V ⁺ =30V, CMR>70dB | 0 | - | V ⁺ -1.5 | V |
| Common Mode Rejection Ratio | CMR | R _S <10kΩ | 70 | 100 | - | dB |
| Output Source Current | I _{SOURCE} | V ⁺ =15V, V _O =+2V, V _{ID} =1V | 20 | 40 | - | mA |
| Output Sink Current | I _{SINK} | V ⁺ =15V, V _O =+2V, V _{ID} =1V V ⁺ =15V, V _O =+0.2V, V _{ID} =1V | 10 | 20 | - | mA |
| - | - | 12 | 50 | - | μA | |
| High level output voltage | V _{OH} | R _L =2kΩ, V ⁺ =30V R _L =10kΩ, V ⁺ =30V | 26 | 27 | - | V |
| - | - | 27 | 28 | - | V | |
| Low level output voltage | V _{OL} | R _L =10kΩ | - | 5 | 20 | mV |
| Slew Rate | SR | V ⁺ =15V, V _{IN} =0.5 to 3V, C _L =100pF | - | 0.6 | - | V/μs |
| Gain Band Width Product | GBP | V ⁺ =30V, f=100kHz, V _{IN} =10mVrms, R _L =2kΩ, C _L =100pF | - | 1.1 | - | MHz |
| Total Harmonic Distortions | THD | f=1kHz, G _V =20dB, R _L =2kΩ, V _O =2V _{pp} , C _L =100pF | - | 0.02 | - | % |
| Equivalent input noise voltage | e _n | f=1kHz, R _S =100Ω, V ⁺ =30V | - | 30 | - | nV/√Hz |
| Channel Separation | CS | 1kHz<f<10kHz | - | 120 | - | dB |

■ TYPICAL CHARACTERISTICS

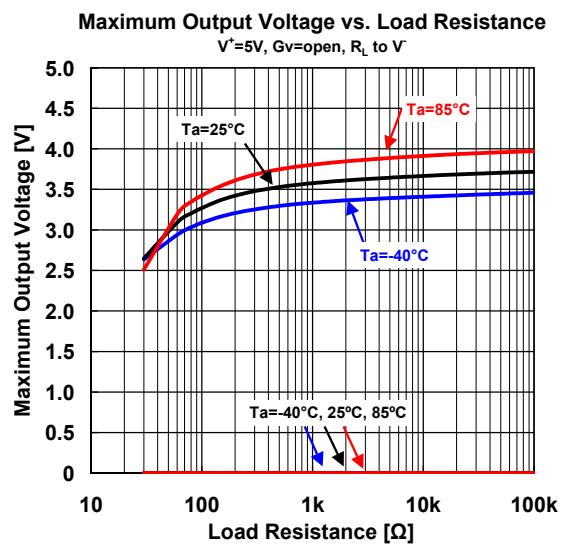
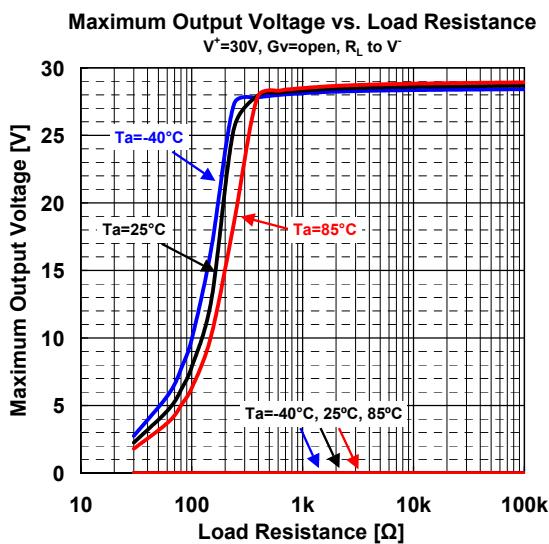
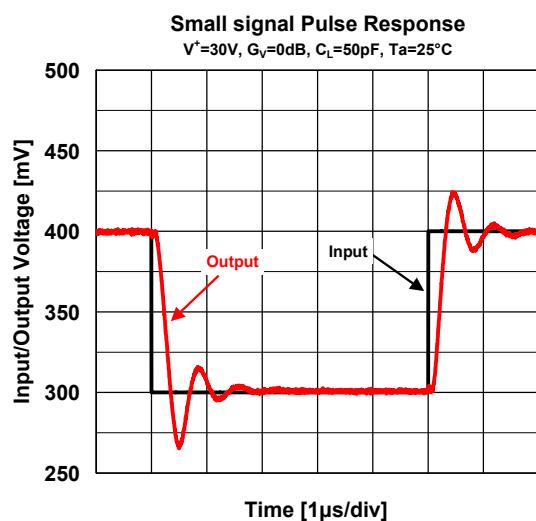
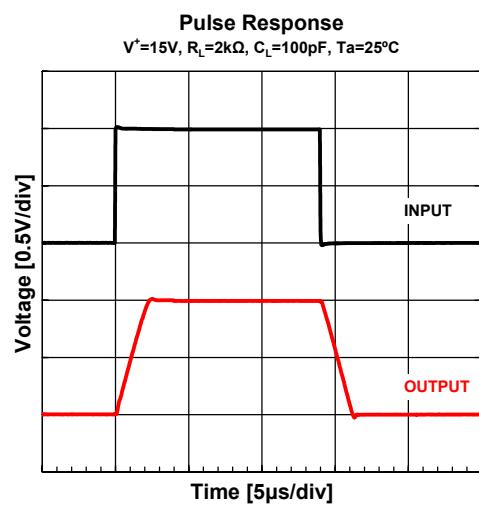
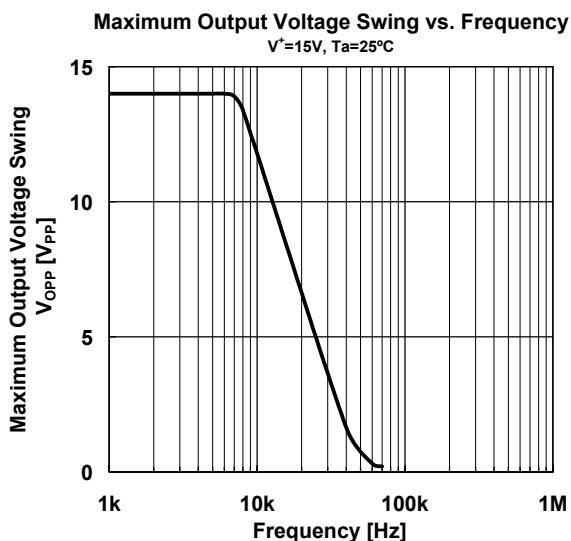
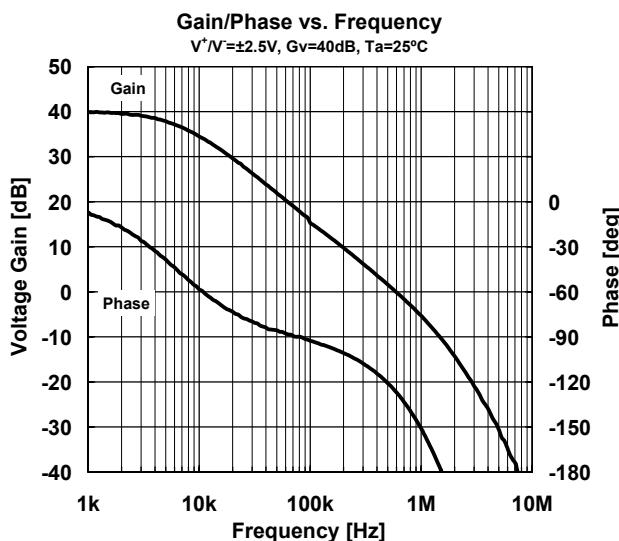


NJM2904C

■ TYPICAL CHARACTERISTICS

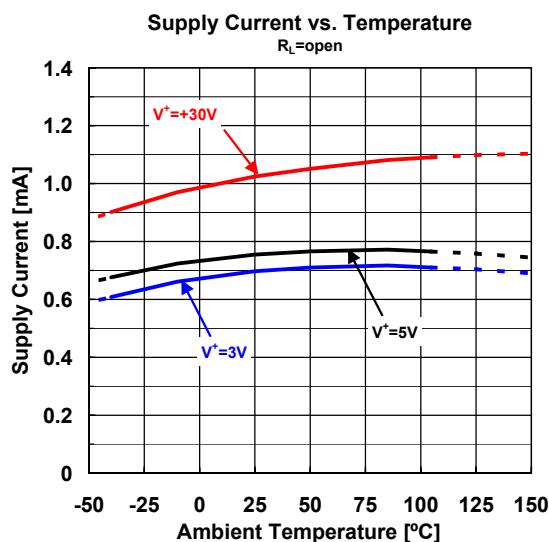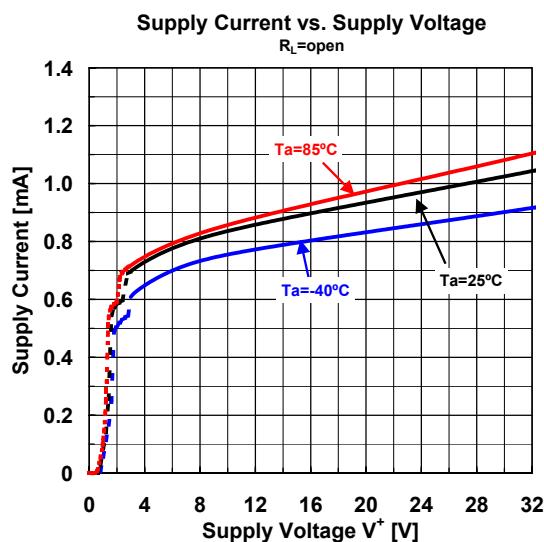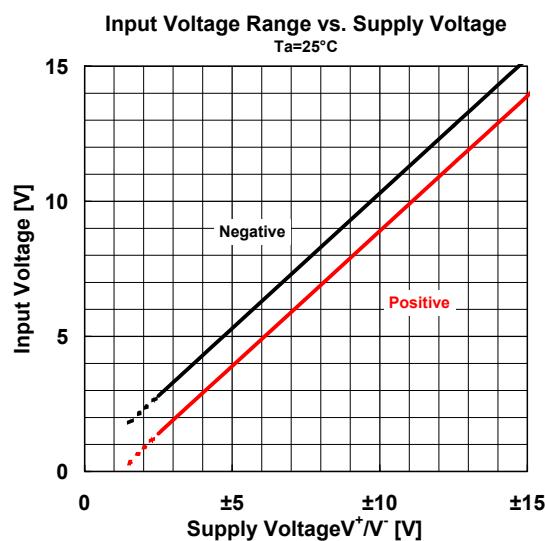
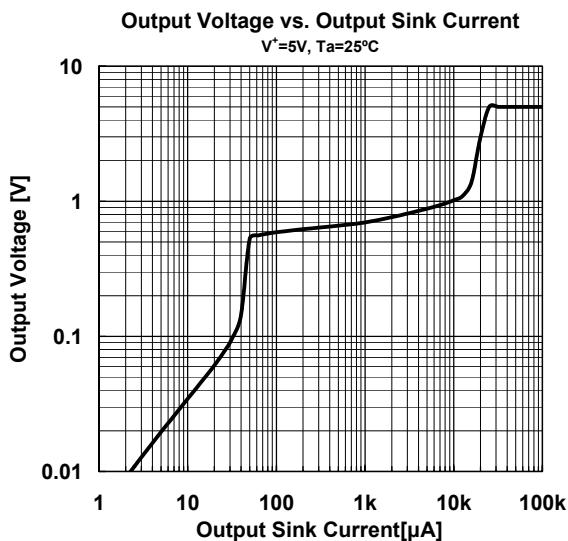
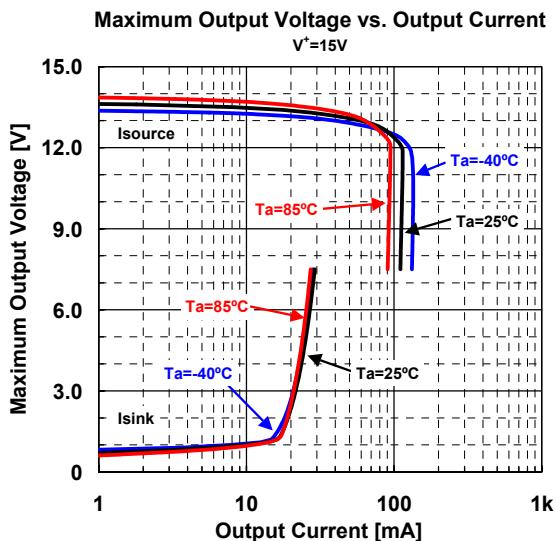
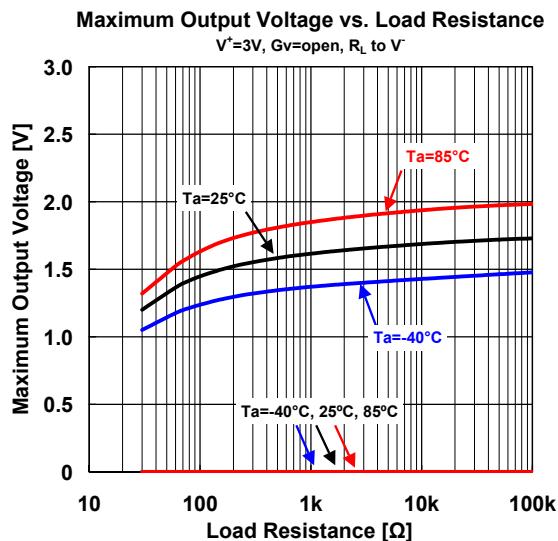


■ TYPICAL CHARACTERISTICS

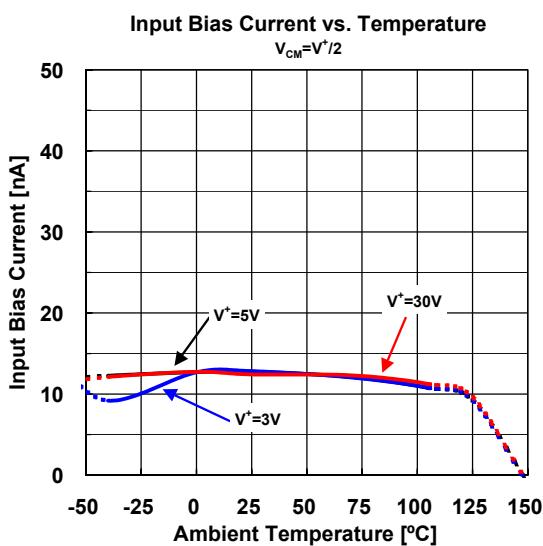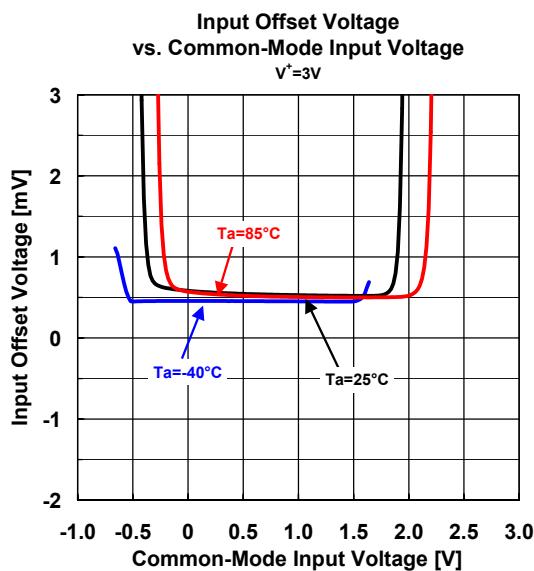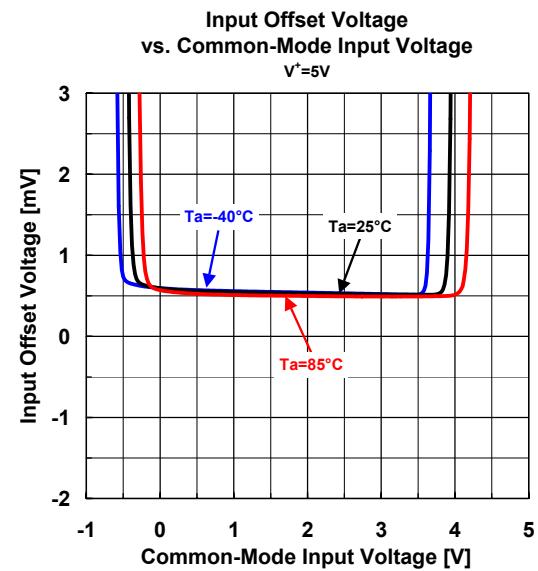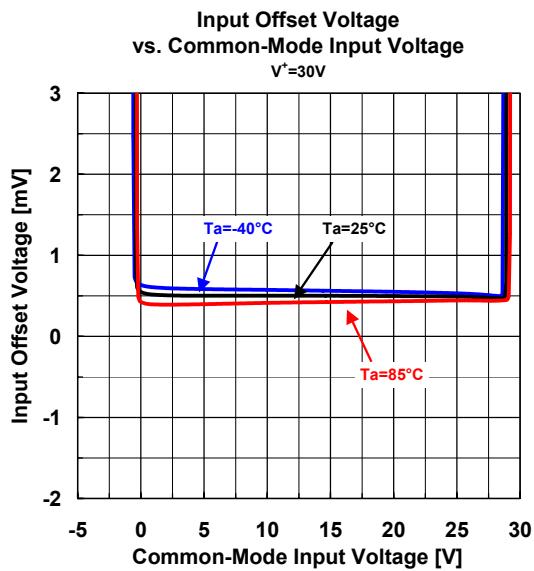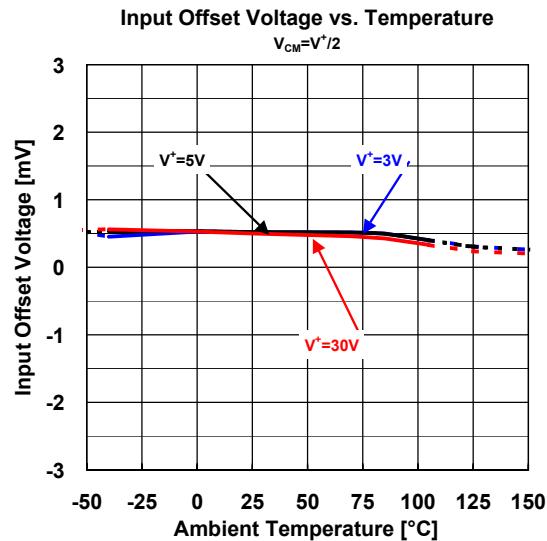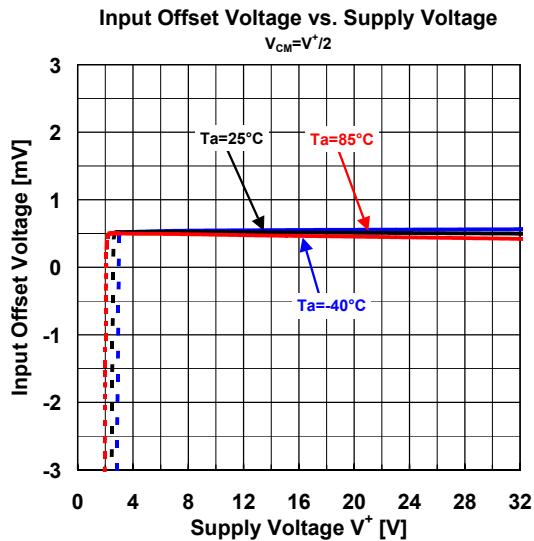

NJM2904C


■ TYPICAL CHARACTERISTICS

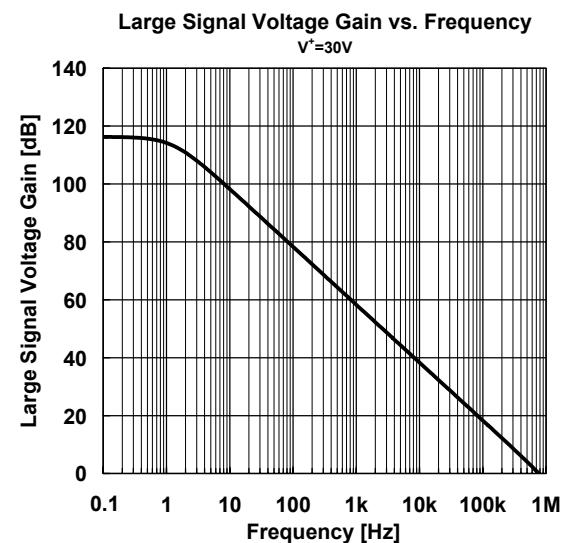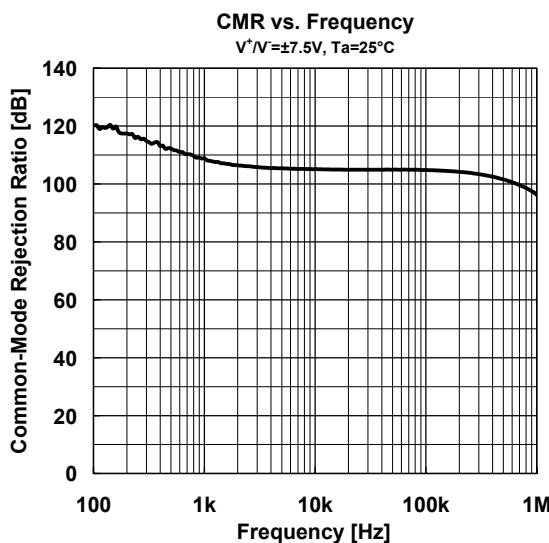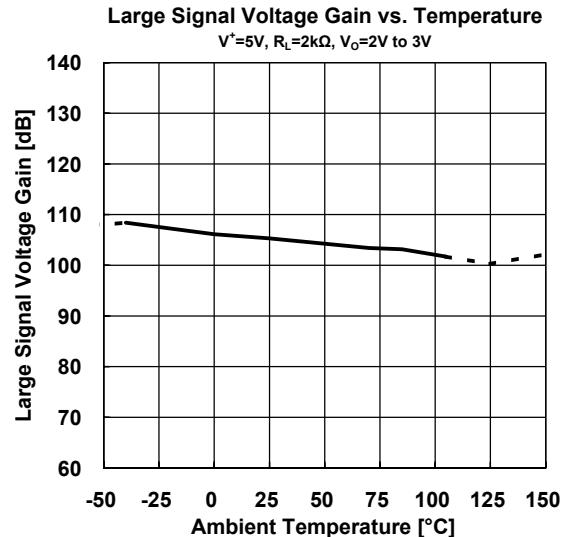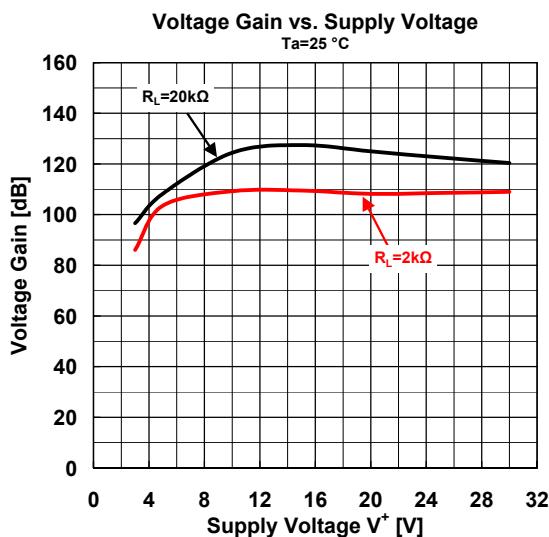

■ APPLICATION

Improvement of Cross-over Distortion

Equivalent circuit at the output stage


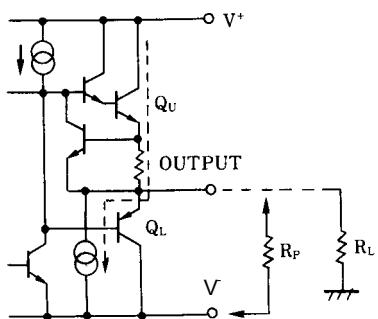


NJM2904C,in its static state (No in and output condition) when design, Q_U being biassed by constant current (break down beam) yet, Q_L stays OFF.

While using with both power source mode,the cross-over distortion might occur instantly when Q_L ON.

There might be cases when application for amplifier of audio signals,not only distortion but also the apparent frequency bandwidth being narrowed remarkably.


It is adjustable especially when using both power source mode, constantly to use with higher current on Q_U than the load current (including feedback current),and then connect the pull-down resister R_P at the part between output and V pins.

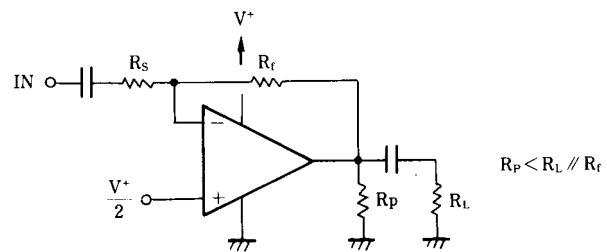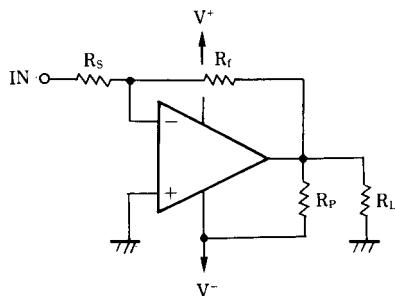


NJM2904C

■PACKAGE OUTLINE UNIT : mm

SOP8

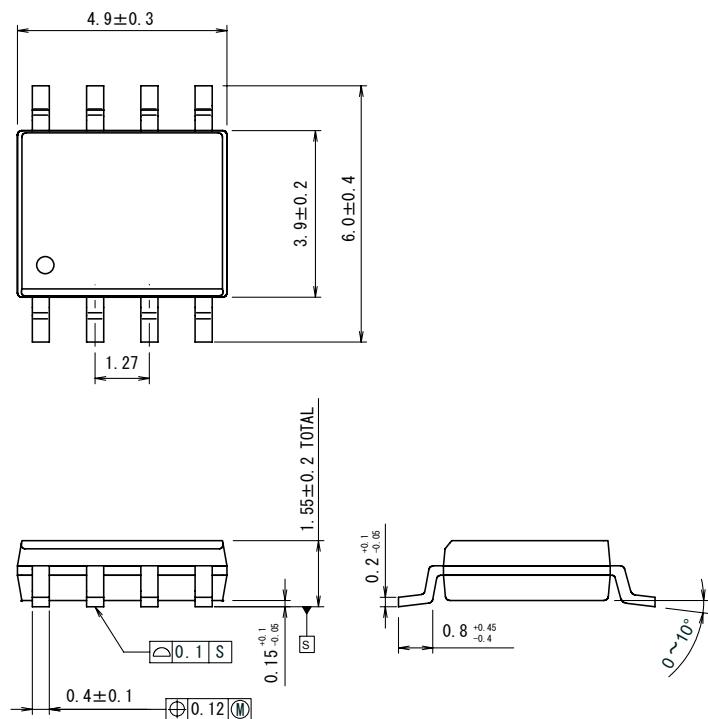


DMP8

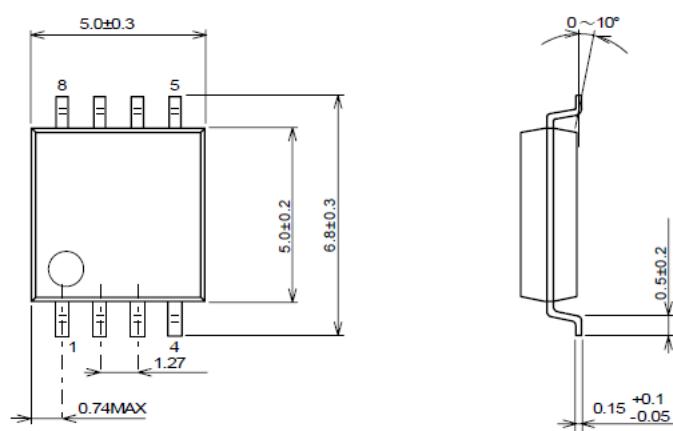

■PACKAGE OUTLINE UNIT : mm

MSOP8 (TVSP8)*

*MEET JEDEC MO-187-DA / THIN TYPE

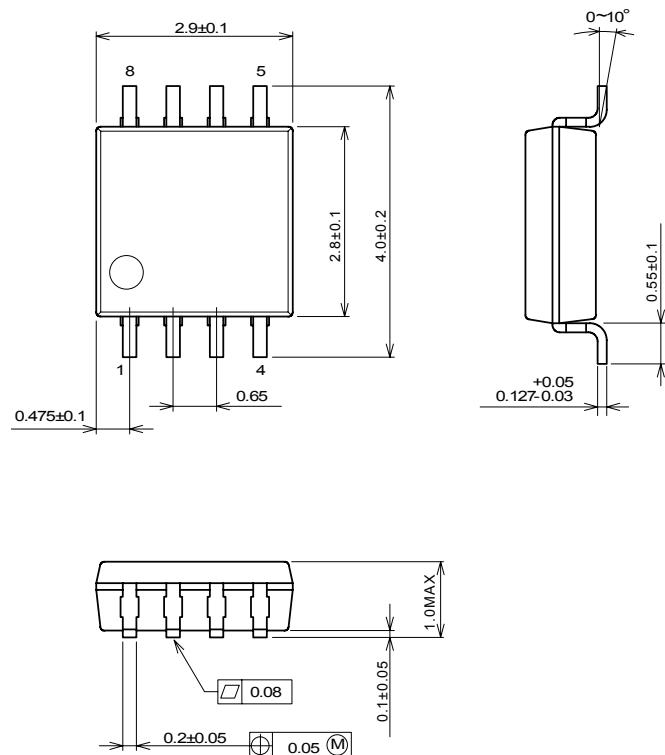

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.