


Data: 1 File: D:\TEST DATA\LP14.07.30.EM6 (2)

Date: 2014-07-30 Time: 15:55:59

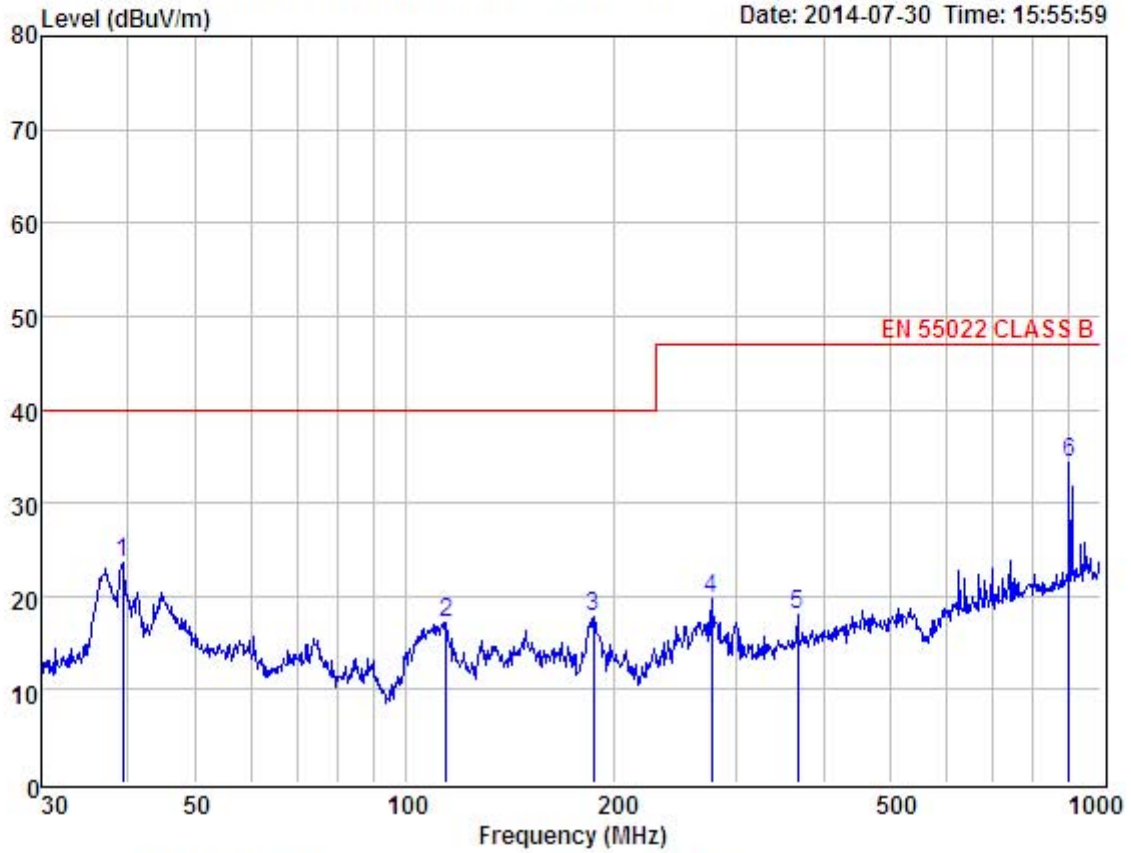


Condition : EN 55022 CLASS B 3m POL: HORIZONTAL  
 EUT : Adapter  
 Model No : LP3773 5V /1.2A  
 Test Mode : Full Load  
 Power : AC 230V/50Hz  
 Test Engineer : Store  
 Remark :  
 Temp :  
 Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	39.30	35.38	14.07	25.81	0.00	23.64	40.00	-16.36	Peak
2	114.51	32.44	11.68	26.87	0.00	17.25	40.00	-22.75	Peak
3	186.44	33.69	10.95	26.94	0.00	17.70	40.00	-22.30	Peak
4	276.12	31.61	12.26	24.15	0.00	19.72	47.00	-27.28	Peak
5	366.82	28.17	14.16	24.32	0.00	18.01	47.00	-28.99	Peak
6	900.15	38.26	21.67	25.65	0.00	34.28	47.00	-12.72	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Data: 2 File: D:\TEST DATA\LP14.07.30.EM6 (2)

Date: 2014-07-30 Time: 15:57:33

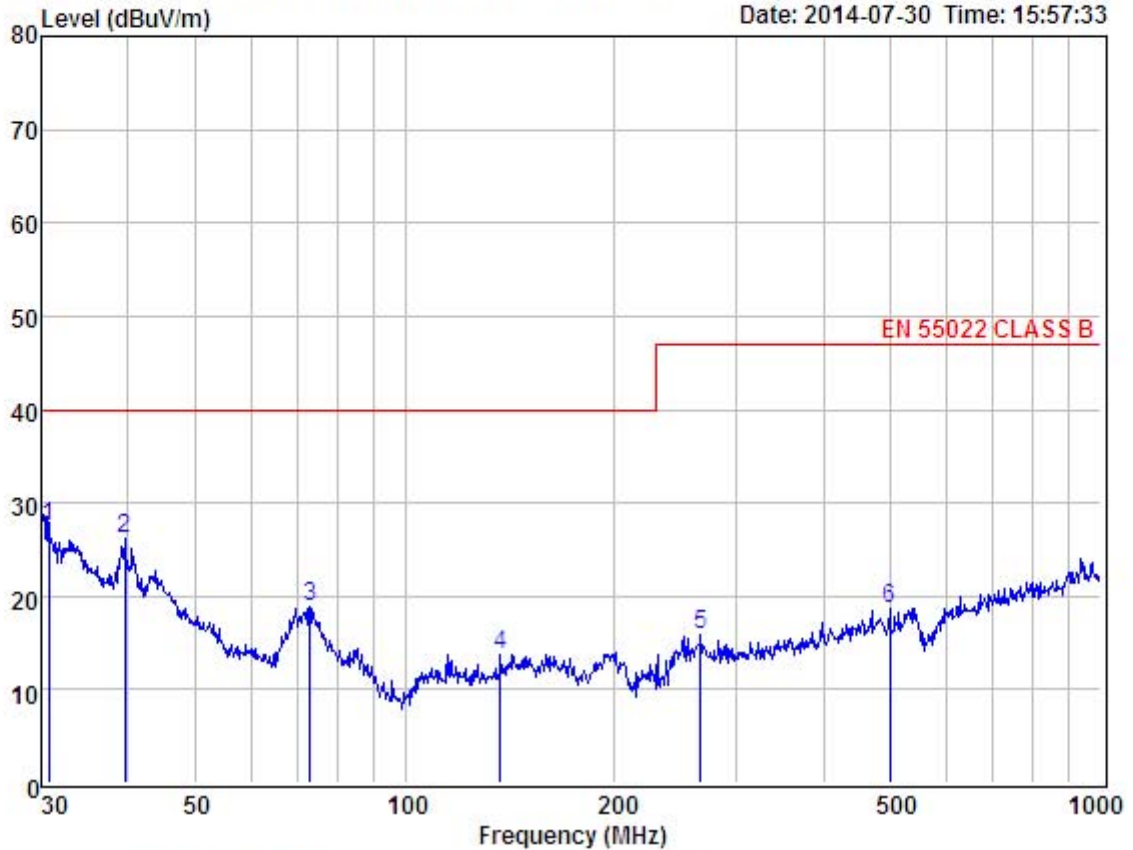

Condition : EN 55022 CLASS B 3m POL: VERTICAL  
 EUT : Adapter  
 Model No : LP3773 5V /1.2A  
 Test Mode : Full Load  
 Power : AC 230V/50Hz  
 Test Engineer : Store  
 Remark :  
 Temp :  
 Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	30.75	39.56	13.22	25.43	0.00	27.35	40.00	-12.65	Peak
2	39.58	37.97	14.07	25.81	0.00	26.23	40.00	-13.77	Peak
3	73.10	35.49	10.21	26.77	0.00	18.93	40.00	-21.07	Peak
4	136.94	27.51	13.22	26.90	0.00	13.83	40.00	-26.17	Peak
5	265.68	28.04	11.96	24.13	0.00	15.87	47.00	-31.13	Peak
6	497.68	26.89	16.48	24.61	0.00	18.76	47.00	-28.24	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss